

PERFORMANCE
RELIABILITY
AND
VALUE

1x4 VGA Extender over CAT5/6 with Audio up to 1,000ft. (300m)

Extend and distribute up to four high-resolution VGA signals over CAT5e/6 cable



The KanexPro 1x4 VGA extender over CAT5e/6 cable is designed for routing and distributing four high-resolution VGA signals and stereo audio over remote distances up to 1,000ft. (300m). Each receiver set features a separate gain and peaking rotary switch used in adjusting brightness and skew over long distances. The 15-pin HD connectors are convenient and cost-effective for all input/ output connections supporting full bandwidth. Fully compatible with VGA to WUXGA graphics card resolution and HDTV's to projectors. In addition, each output performs a separate buffering to maintain signal integrity and reject noise interference.

Features

- Extend four independent high-resolution VGA signals with audio over Cat5E/6 cables up to 1,000 feet (300m)
- Adjust GAIN and PEAK levels to adapt for variable lengths of UTP cable on the receiver side
- Supports maximum resolutions up to WUXGA (1920x1200@60Hz)
- Stereo audio through 3.5mm jack
- Dual output for transmitter: VGA for local display and 4 x Cat5e/6
- EDID Compliant
- Rack or under-desk mountable
- 5VDC external power supply included

Specifications

Interface: Transmitter

Input: VGA x1/3.5mm Stereo x1
Output: Cat 5e/6 x4/VGA Output (Local) x1/3.5mm Stereo x1

Receiver

Input: Cat 5e/6 x1
Output: VGA x1/3.5mm Stereo x1

Vertical Frequency Range: 60/75/85Hz

Resolutions (PC):

640x480	800x600	1024x768
1280x720	1280x768	1280x960
1280x1024	1600x900	1600x1200
1920x1080	1920x1200	

Power Supply: Transmitter: 5V DC@2A, 10W

Receiver: 5V DC@2A, 5W

Operating Temperature: 0°C to +70°C

Operating Humidity: 10% to 85 % RH (no condensation)

Storage Temperature: -10°C to +80°C

Storage Humidity: 5% to 90 % RH (no condensation)

Regulatory Approvals Converter: FCC, CE, UL

Regulatory Approvals Power Supply: FCC, CE, UL

Dimensions: VGA Extender Transmitter: 5.75"x2.75"x1" (146x70x25.5mm)


Receiver: 3.25"x1.4"x0.8" (82.6x35.6x20mm)

Total Weight: VGA Extender: 0.7lbs (320g)

Receiver: 0.25lbs (115g)

Warranty: 1 Year parts and labor

Connection Diagram

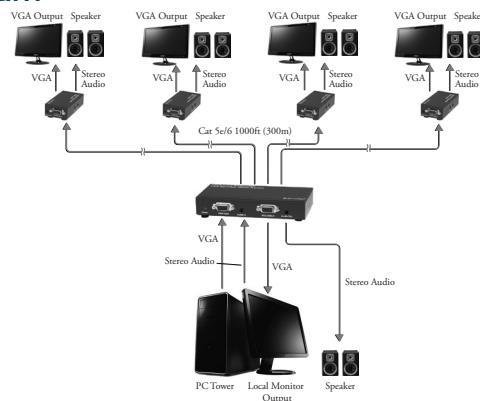

KanexPro

1405 Pioneer St.

Brea CA 92821

562-501-9380

info@kanexpro.com

www.kanexpro.com

MPN: VGAEXTX4